




BLD





Primary Mount Type: Top Mount, Extended Mount
Alternate Mount Type: Inside Mount
Recommended Trim: Quarter Round
Standard Size: 3/4" x 2 1/2"
Variations: 2" depth available. Custom depths available for a surcharge


TOP MOUNT

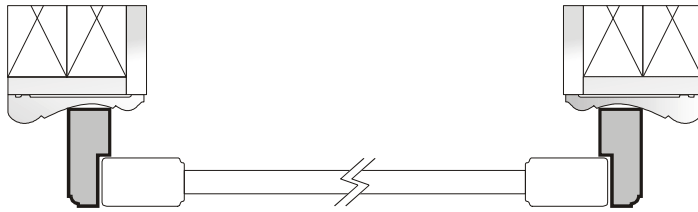


EXTENDED MOUNT

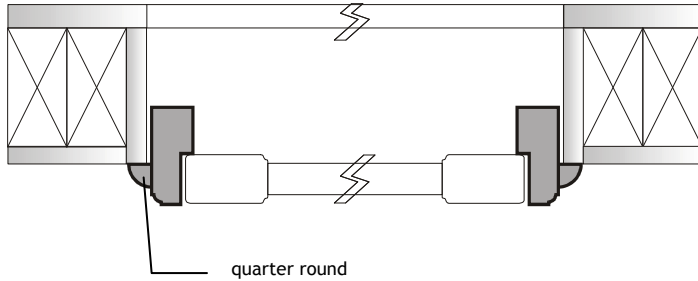


L



Primary Mount Type: Inside Mount
Alternate Mount Type: Top Mount, Extended Mount
Recommended Trim: Crack Mold
Standard Size: 3/4" x 2"
Variations: Custom depths and widths may be specified for a surcharge

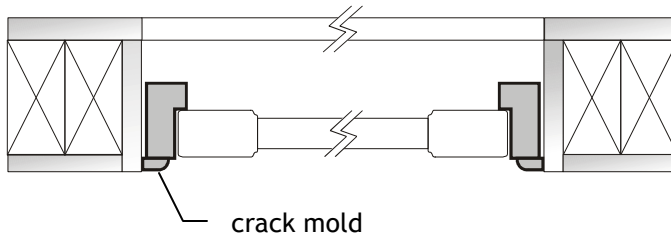


NL (D)




Primary Mount Type: used as a sill piece or to seam frames together
Standard Size: NL 1/2" x 2"
 NLD 1/2" x 2 1/2"
Variations: Custom depths and widths may be specified for a surcharge

WBL



Primary Mount Type: Top Mount, on or around casing
Recommended Trim: None
Standard Size: 1 1/4" w x 2"
Variations: Custom depths available for a surcharge


DL




Primary Mount Type: Top Mount
Recommended Trim: None
Standard size: 2 1/4" x 2"
Variations: Custom depths available for a surcharge

Surcharges for some specialty shapes apply


Top Mount on Drywall

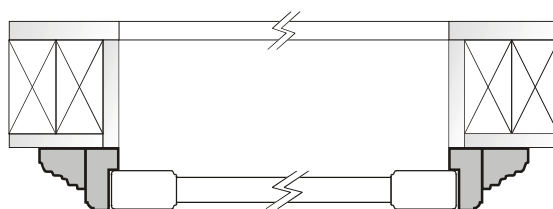


Top Mount on Trim

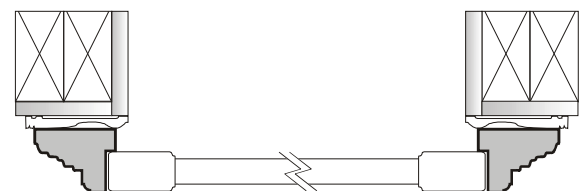


ADF




Primary Mount Type: Top Mount onto atrium doors without raised trim around glass
Recommended Trim: None, mount through flange
Standard Size: 1 13/16" x 3"
Variations: Custom depths available for a surcharge

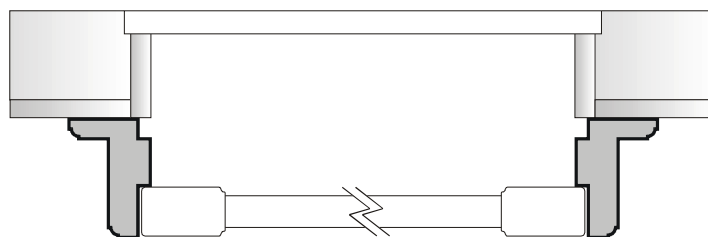


ADR




Primary Mount Type: Top Mount onto atrium doors with raised molding.
Recommended Trim: None, mount through flange
Standard Size: 1 13/16" x 3"
Variations: None

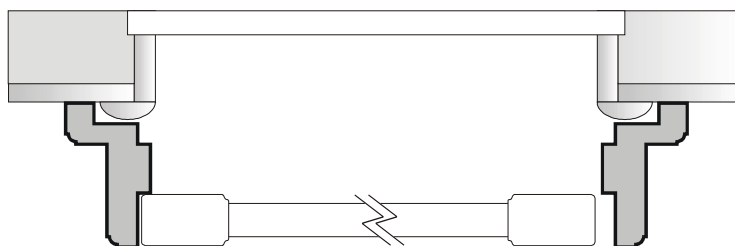


BZ



Primary Mount Type: Inside Mount Only, excellent for slightly out of square windows.
Recommended Trim: None necessary. The casing covers most imperfections.
Standard Size: 1 3/8" x 2"
Variations: Build out of frame width and casing depth is available for a surcharge

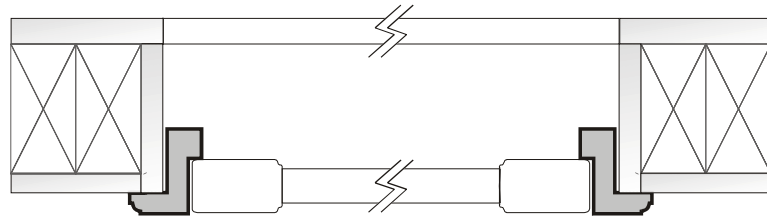



CZ



Primary Mount Type: Inside Mount Only, excellent for out of square windows.
Recommended Trim: None necessary. The casing covers most imperfections
Standard Size: 2 1/4" x 2"
Variations: Build out of frame width and casing depth is available for a surcharge


** Surcharge for some specialty shapes applies

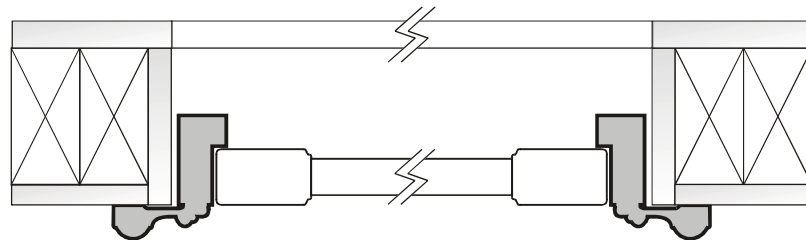




QUARTER ROUND

Primary Use: To cover gaps or cracks where frame meets window
Primary Frame: BLD Frame, Top or Extended Mount
Standard Size: 1/4" x 1/4"




CRACK MOLD

Primary Use: To cover gaps between frame and window
Primary Frame: L Mold
Standard Size: 5/16" x 11/16"
Variations: Double Crack Mold 5/16" x 11/16" both edges with radius
Wide Crack Mold 5/16" x 2"



SLS

Primary Use: As light stop where no frame is used
Primary Frame: None
Standard Size: 5/16" x 11/16"



HANG STRIP

Primary Use: inside mount where the look of no frame is desired, but direct hinge is not feasible
Primary Frame: None
Standard Size: 1 1/8" x 1 1/8"