




# BLD





**Primary Mount Type:** Top Mount, Extended Mount  
**Alternate Mount Type:** Inside Mount  
**Recommended Trim:** Quarter Round  
**Standard Size:** 3/4" x 2 1/2"  
**Variations:** 2" depth available. Custom depths available for a surcharge


## TOP MOUNT

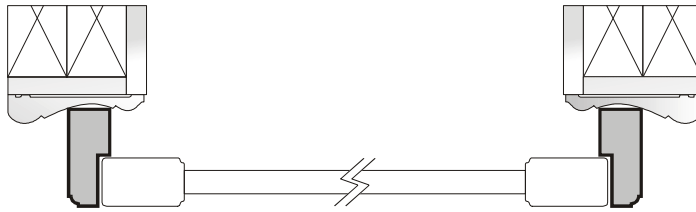


## EXTENDED MOUNT

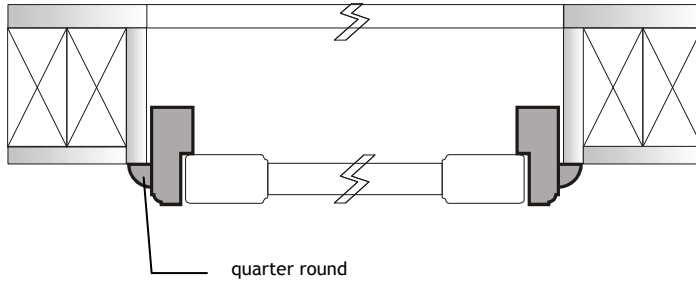


# L



**Primary Mount Type:** Inside Mount  
**Alternate Mount Type:** Top Mount, Extended Mount  
**Recommended Trim:** Crack Mold  
**Standard Size:** 3/4" x 2"  
**Variations:** Custom depths and widths may be specified for a surcharge

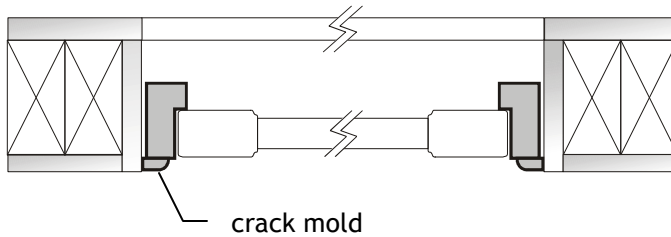


# NL (D)




**Primary Mount Type:** used as a sill piece or to seam frames together  
**Standard Size:** NL 1/2" x 2"  
 NLD 1/2" x 2 1/2"  
**Variations:** Custom depths and widths may be specified for a surcharge

# WBL



**Primary Mount Type:** Top Mount, on or around casing  
**Recommended Trim:** None  
**Standard Size:** 1 1/4" w x 2 "  
**Variations:** Custom depths available for a surcharge


# DL




**Primary Mount Type:** Top Mount  
**Recommended Trim:** None  
**Standard size:** 2 1/4" x 2"  
**Variations:** Custom depths available for a surcharge

Surcharges for some specialty shapes apply


Top Mount on Drywall

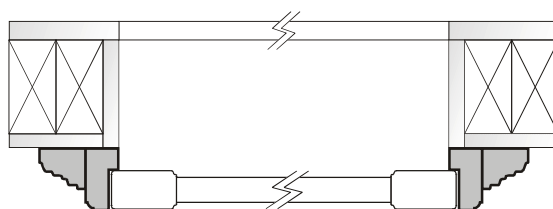


Top Mount on Trim

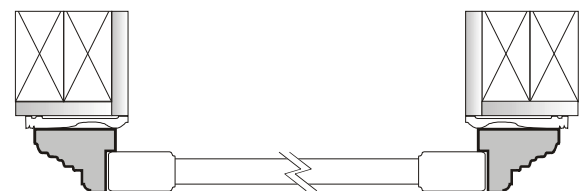


# ADF

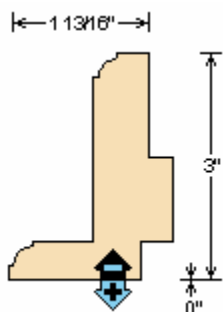


**Primary Mount Type:** Top Mount onto atrium doors *without* raised trim around glass  
**Recommended Trim:** None, mount through flange  
**Standard Size:** 1 13/16" x 3"  
**Variations:** Custom depths available for a surcharge

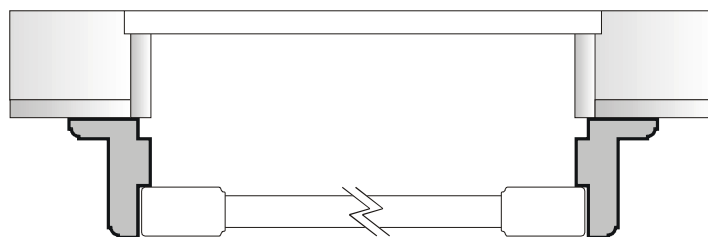


# ADR




**Primary Mount Type:** Top Mount onto atrium doors *with* raised molding.  
**Recommended Trim:** None, mount through flange  
**Standard Size:** 1 13/16" x 3"  
**Variations:** None

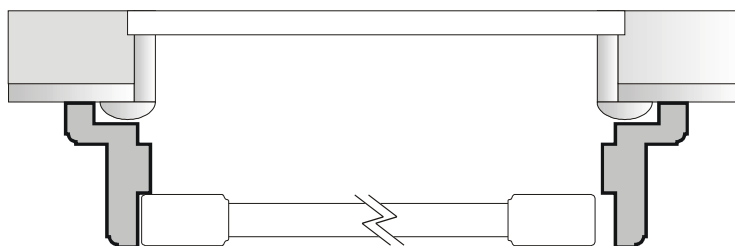


# BZ



**Primary Mount Type:** Inside Mount Only, excellent for slightly out of square windows.  
**Recommended Trim:** None necessary. The casing covers most imperfections.  
**Standard Size:** 1 3/8" x 2"  
**Variations:** Build out of frame width and casing depth is available for a surcharge

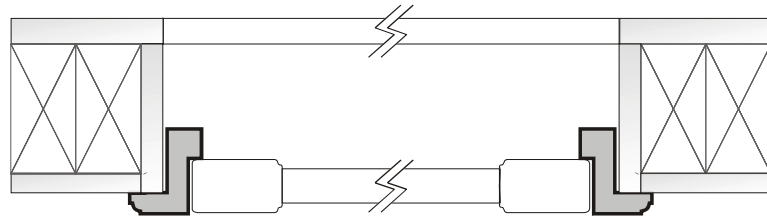



# CZ



**Primary Mount Type:** Inside Mount Only, excellent for out of square windows.  
**Recommended Trim:** None necessary. The casing covers most imperfections  
**Standard Size:** 2 1/4" x 2"  
**Variations:** Build out of frame width and casing depth is available for a surcharge


\*\* Surcharge for some specialty shapes applies

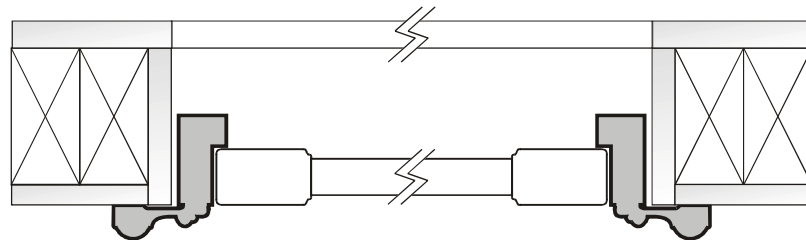




## QUARTER ROUND

Primary Use: To cover gaps or cracks where frame meets window  
Primary Frame: BLD Frame, Top or Extended Mount  
Standard Size: 1/4" x 1/4"




## CRACK MOLD

Primary Use: To cover gaps between frame and window  
Primary Frame: L Mold  
Standard Size: 5/16" x 11/16"  
Variations: Double Crack Mold 5/16" x 11/16" both edges with radius  
Wide Crack Mold 5/16" x 2"



## SLS

Primary Use: As light stop where no frame is used  
Primary Frame: None  
Standard Size: 5/16" x 11/16"



## HANG STRIP

Primary Use: inside mount where the look of no frame is desired, but direct hinge is not feasible  
Primary Frame: None  
Standard Size: 1 1/8" x 1 1/8"